
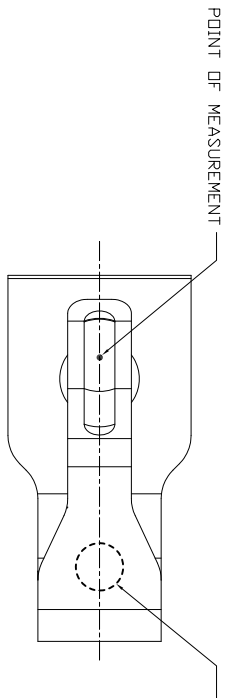
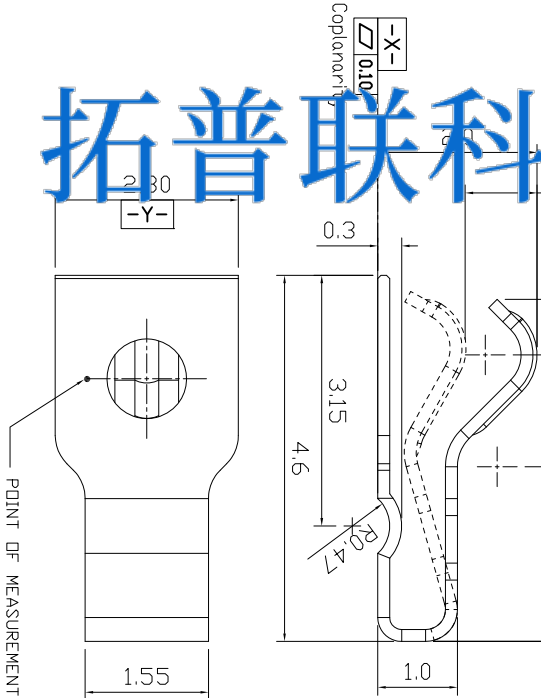


LDC
-
DIST
-

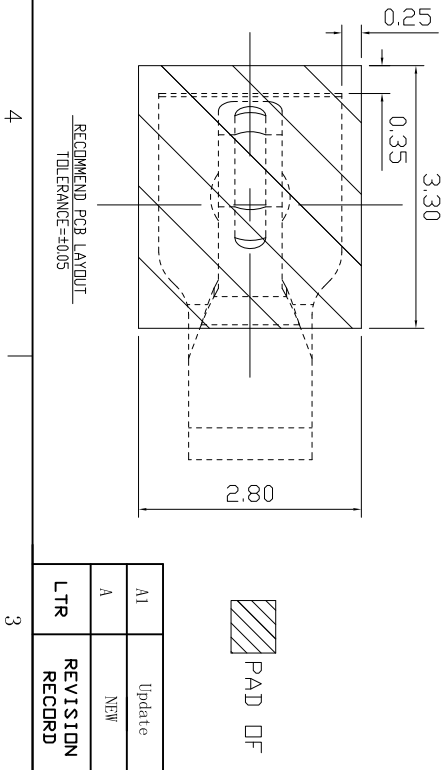


TOP-LINK

A1	Update		2015/11/06
A	NEW		
LTR	REVISION RECORD	APVD	DATE

PAD OF PCB.

200014-1		2	CARRIER TAPE	P=8mm	WHITE=12mm,Q/Y/REL=3000 Pcs
1	2.0H 2.3W ANTENNA CLIPS	1Pcs	NOTES 1,2		
ASSEMBLY NUMBER		ITEM	PART NAME	QTY	DESCRIPTION
DIMENSIONS IN MM					
TOLERANCES UNLESS					
OTHER SPECIFIED					
0 = ±					
0.0 = ±0.15					
0.00 = ±0.10					
ANGLE: = ±3°					
0 = ±1.5°					
REMOVE BURRS, BREAK					
SHARP EDGES R0.10 MAX					
DO NOT SCALE PRINT					
NAME					
CUSTOMER DRAWING FOR 2. 0H, 2. 3W, ANTENNA CLIPS					
SCALE					
1:1					
A4					
DWG NO.					
C-200014					
SHEET					
1 OF 1					
REV					
A1					

- NOTES:
1. MATERIAL: COPPER ALLOY, THICKNESS=0.15.
 2. PLATING: 1.25um(S0.4*2)Min Ni UNDER PLATING, 0.025um(0.4*2)Min Au PLATING OVER ALL.
 3. SPECIFICATION:
 - 3.1 ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 1.0A,
VOLTAGE RATING : 50 VAC/DC,
LOW LEVEL CONTACT RESISTANCE:50mΩ MAX
 - 3.2 MECHANICAL CHARACTERISTICS:
CONTACT NORMAL FORCE: 50gf min PER PIN AT WORKING STROKE
DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE WITHOUT DEGRADING
 - 3.3 ENVIRONMENTAL CHARACTERISTICS:
OPERATING TEMPERATURE RANGE : -20°C TO +70°C,
TAPE & REEL PACKAGING PER EIA481 STANDARD,
5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009,
6. HARMFUL MATERIAL CONTROL FOLLOW 'RoHS'



USED ON