


LDC
-
DIST
-

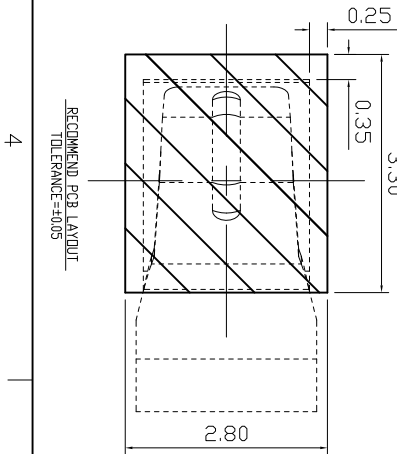


PAD OF PCB.

A1	Update		2015/11/06
A	NEW		
LTR	REVISION RECORD	APVD	DATE


200019-1	2	CARRIER TAPE	P=8mm	WHITE:W=12mm,D/V/REEL=1700 Pcs
1	4.5H 2.5W ANTENNA CLIPS	1PCS	NOTES 1,2	
DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED 0 = ± 0.0 = ±0.15 0.00 = ±0.10 ANGLE: = ±3° 0.0 = ±1.5°				
REMOVE BURRS, BREAK SHARP EDGES R0.10 MAX DO NOT SCALE PRINT				

MATL	1	HT TR	FIN
DVN	Calwenlu	APVD	Lansing
CHK	Kent	REL	Top-Link Electronics L td.
NAME	CUSTOMER DRAWING FOR 4.5H, 2.5W, ANTENNA CLIPS		
SCALE	1:1	A4	DWG NO. C-200019
SHEET	1 OF 1	REV	A1

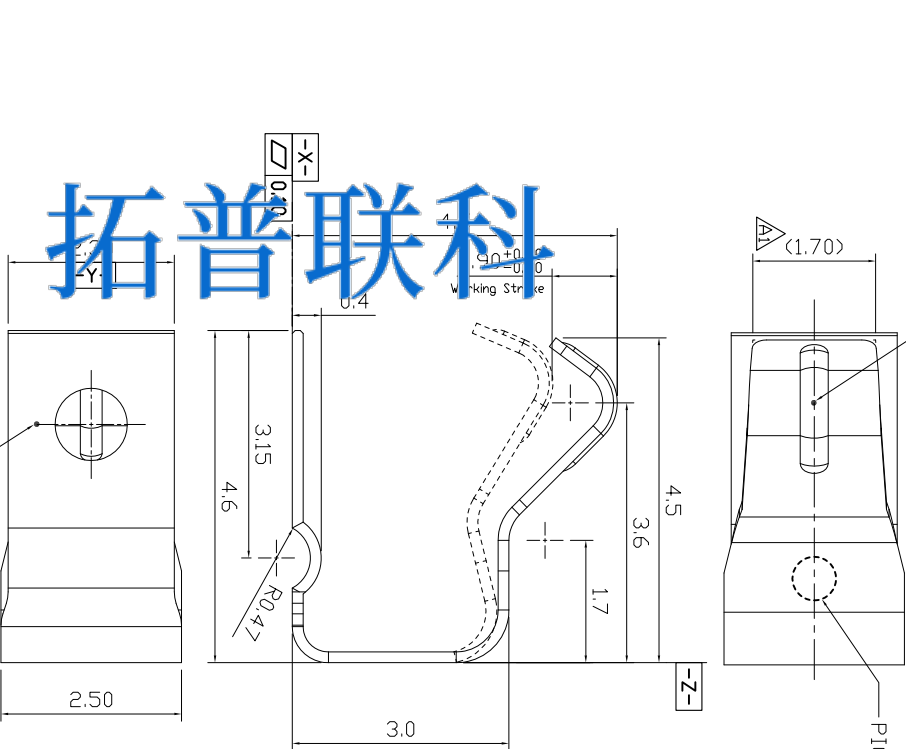

TOP-LINK

- NOTES:
1. MATERIAL:
COPPER ALLOY, THICKNESS=0.15.
 2. PLATING:
1.25um(50u"min Ni UNDER PLATING,
0.025um(1u"min Au PLATING OVER ALL.
 3. SPECIFICATION:
3.1 ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 10A.
VOLTAGE RATING : 50 VAC/DC.
LOW LEVEL CONTACT RESISTANCE:50mΩ MAX
 - 3.2 MECHANICAL CHARACTERISTICS:
CONTACT NORMAL FORCE: 50gf min PER PIN AT
WORKING STROKE
DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE
WITHOUT DEGRADING
 - 3.3 ENVIRONMENTAL CHARACTERISTICS:
OPERATING TEMPERATURE RANGE : -20°C TO +70°C.
4. TAPE & REEL PACKAGING PER EIA481 STANDARD.
5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.
6. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"



USED ON