





POINT OF MEASUREMENT
PICK&PLACE AREA

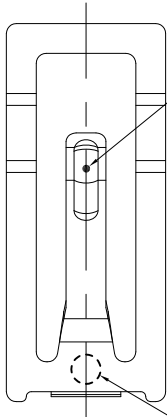

(2.7)

0.65±0.15
Working Stroke

-X-
0.10

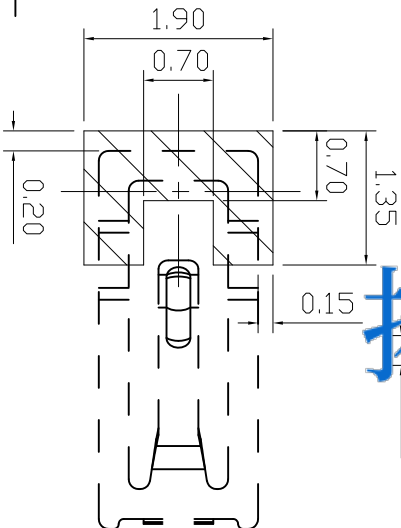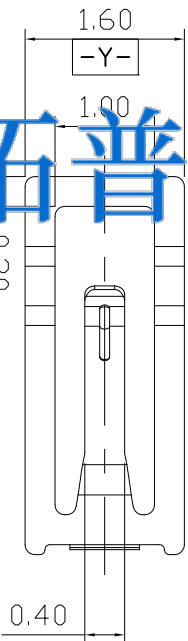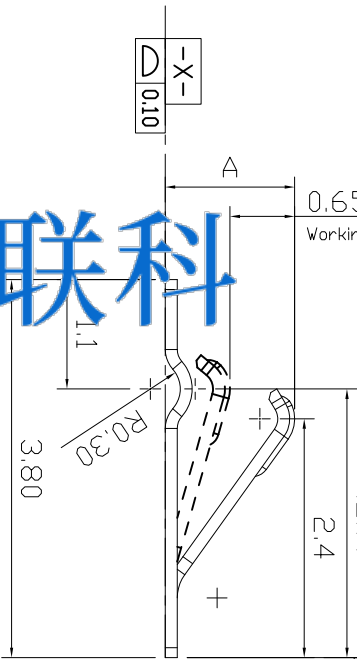

PAD OF PCB.

RECOMMEND PCB LAYOUT
TOLERANCE=±0.05



4

3

2

1

TOP-LINK



USED ON

NOTES:

1. MATERIAL:
COPPER ALLOY, THICKNESS=0.12.
2. PLATING:
1.25um(50u"Min Ni UNDER PLATING,
0.025um(1u"Min Au PLATING OVER ALL.

3. SPECIFICATION:

- 3.1 ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 10A.
VOLTAGE RATING : 50 VAC/DC.
LOW LEVEL CONTACT RESISTANCE:50mΩ MAX

3.2 MECHANICAL CHARACTERISTICS:

- CONTACT NORMAL FORCE: 30gf Min PER PIN AT
WORKING STROKE
DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE
WITHOUT DEGRADING

3.3 ENVIRONMENTAL CHARACTERISTICS:

4. TAPE & REEL PACKAGING PER EIA481 STANDARD.
5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.
6. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±
0.0 = ±0.15
0.00 = ±0.10
ANGLE:
0 = ±1.5°
0.0 = ±1.5°

REMOVE BURRS, BREAK
SHARP EDGES R0.10 MAX
DO NOT SCALE PRINT

200054-1	2	CARRIER TAPE	P=8mm	WHITE:W=12mm,Q/V/REEL=**** Pcs	1,6±0.15
200053-1	1	1.6H 1.6W ANTENNA CLIPS	1Pcs	NOTES 1,2	1,3±0.15

200053-1	2	CARRIER TAPE	P=8mm	WHITE:W=12mm,Q/V/REEL=**** Pcs	1,3±0.15
200053-1	1	1.3H 1.6W ANTENNA CLIPS	1Pcs	NOTES 1,2	1,3±0.15

ASSEMBLY NUMBER	ITEM	PART NAME	QTY	DESCRIPTION	DIMENSION A
200054-1	2	CARRIER TAPE	P=8mm	WHITE:W=12mm,Q/V/REEL=**** Pcs	1,6±0.15
200053-1	1	1.6H 1.6W ANTENNA CLIPS	1Pcs	NOTES 1,2	1,3±0.15

NAME	SCALE	A4	DWG NO.	C-200053	SHEET 1 OF 1	REV A
CHK	REL	REL	REL	REL	REL	REL
DWN	APVD	APVD	APVD	APVD	APVD	APVD

CUSTOMER DRAWING FOR 1. 3&1. 6H, 1. 6W, ANTENNA CLIPS

Top-Link
Electronics Ltd.