
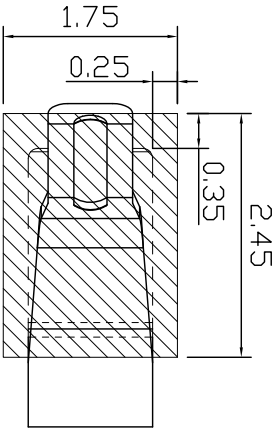




POINT OF MEASUREMENT

PICK&PLACE AREA

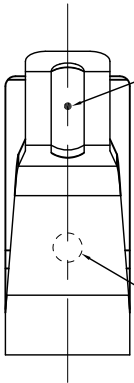

RECOMMEND PCB LAYOUT
TOLERANCE=±0.05

PAD OF PCB.

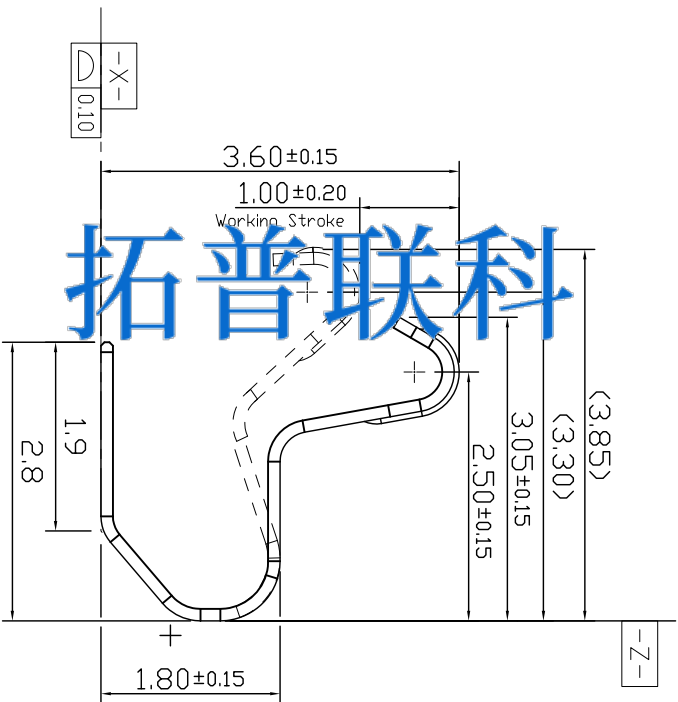

TOP-LINK

- NOTES:
1. MATERIAL: COPPER ALLOY, THICKNESS=0.12.
 2. PLATING: 1.25um(50u"Min Ni UNDER PLATING, 0.025um(1u"Min Au PLATING OVER ALL.

3. SPECIFICATION:
 - 3.1 ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 10A.
VOLTAGE RATING : 50 VAC/DC
LOW LEVEL CONTACT RESISTANCE:50mΩ MAX
 - 3.2 MECHANICAL CHARACTERISTICS:
CONTACT NORMAL FORCE: 30gf Min PER PIN AT WORKING STROKE
DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE WITHOUT DEGRADING
 - 3.3 ENVIRONMENTAL CHARACTERISTICS:
OPERATING TEMPERATURE RANGE : -20°C TO +70°C.
4. TAPE & REEL PACKAGING PER EIA481 STANDARD.
5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.
6. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

200055-1		2	CARRIER TAPE	P=8mm	WHITE.W=16mm.QTY/REEL=2000 Pcs	
ASSEMBLY NUMBER	ITEM	1	3.6H 1.25W ANTENNA CLIPS	IPcs	NOTES 1,2	
DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			PART NAME	QTY	DESCRIPTION	
0	= ±		MATL	1	HT TR	FIN
0.0	= ±0.15		DVN	Kent	APVD	
0.00	= ±0.10		CHK		REL	
ANGLE:	= ±3°		NAME	CUSTOMER DRAWING FOR 3.6H, 1.25W, ANTENNA CLIPS		
0.0	= ±1.5°		SCALE	1:1	A4	DWG NO.
REMOVE BURRS, BREAK SHARP EDGES R0.10 MAX DO NOT SCALE PRINT					C-200055	SHEET 1 OF 1
						REV A

Top-Link
Electronics Ltd.

USED ON

-