
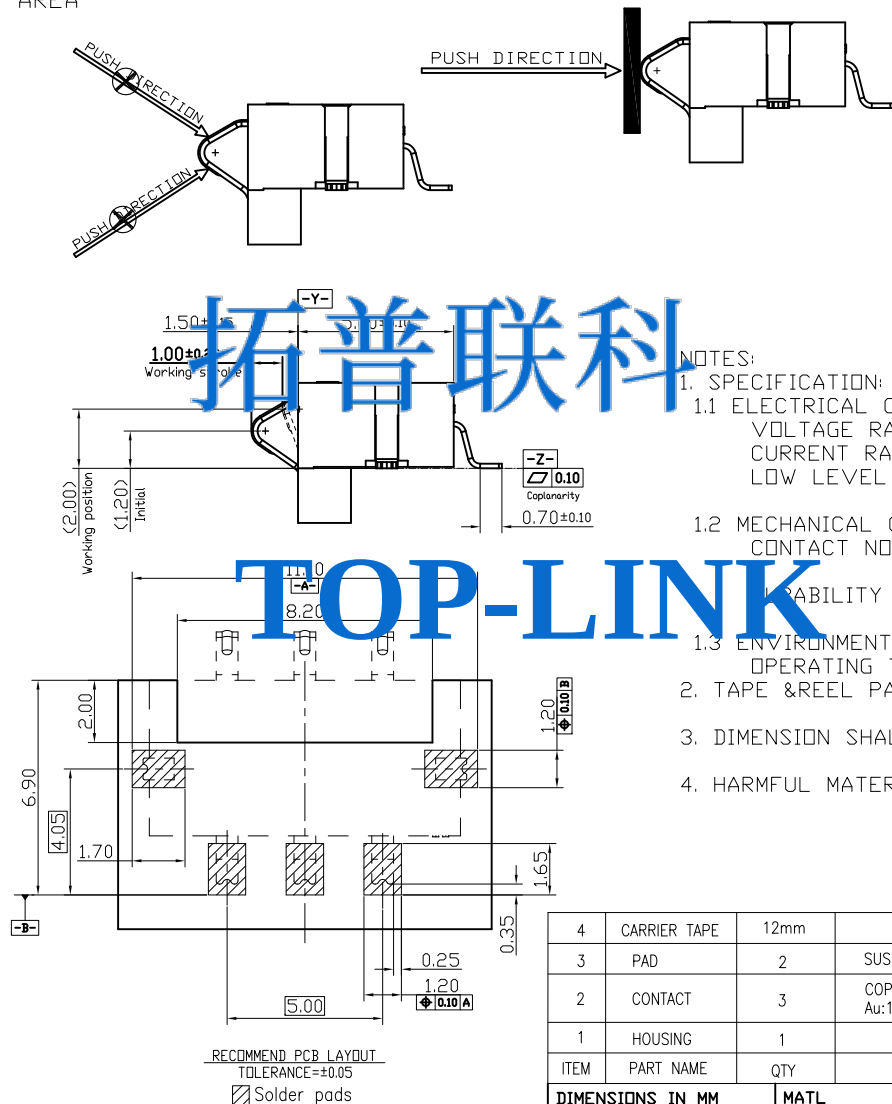
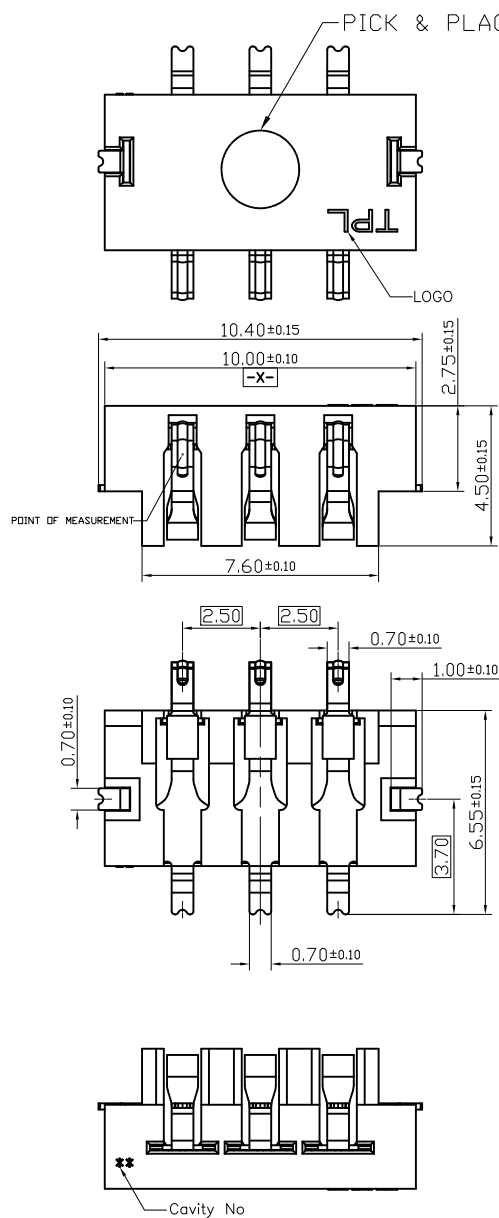


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWG NO.


C-200037



拓普联科

TOP-LINK

USED ON



NOTES:

1. SPECIFICATION:

1.1 ELECTRICAL CHARACTERISTICS:

VOLTAGE RATING : 200V AC/DC

CURRENT RATING:1.0A

LOW LEVEL CONTACT RESISTANCE:50mΩ Max.

1.2 MECHANICAL CHARACTERISTICS:

CONTACT NORMAL FORCE:80gf Min PER PIN AT

WORKING STROKE

DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE WITHOUT DEGRADING

1.3 ENVIRONMENTAL CHARACTERISTICS:

OPERATING TEMPERATURE RANGE : -20°C TO +70°C.

2. TAPE & REEL PACKAGING PER EIA481 STANDARD.

3. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.

4. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

LDC

DIST

LTR	REVISION RECORD	APVD	DATE

			PART NUMBER	200037-3						
4	CARRIER TAPE	12mm	TRANSPARENCY,W=16mm,Q'ty/REEL=1000Pcs.							
3	PAD	2	SUS,Ni:20u"(0.5um)Min OVER ALL,Sn:50u"(1.25um)Min OVER ALL.							
2	CONTACT	3	COPPER ALLOY,Au:1u"(0.025um) Min OVER ALL. Au:10u"(0.25um)Min ON CONTACT AREA.							
1	HOUSING	1	HIGH TEMPERATURE THERMAL PLASTIC							
ITEM	PART NAME	QTY	DESCRIPTION							
DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED 0 = ±— 0.0 = ±0.20 0.00 = ±0.15 ANGLE: 0 = ±3° 0.0 = ±2° REMOVE BURRS. BREAK SHARP EDGES R0.10 MAX DO NOT SCALE PRINT			MATL —		HT TR —		FIN —			
			DWN Kent		APVD Lansing		<u><i>top-Link</i></u> <i>Electronics</i> Top-Link Electronics Ltd.			
			CHK Harvey		REL					
			NAME						CUSTOMER DRAWING FOR 3PIN 2.5PITCH 4.5H SINK BATTERY CONNECTOR (ON BOARD 2.75H)	
			SCALE 1:1		A4		DWG NO. C-200037		SHEET 1 OF 1	